
Instruction Sheet:

Adjust Temperature in Early Models of the Dairy Dispenser



Follow these instructions to adjust the temperature in early models of the dairy dispenser.

- 1. Remove the lower stainless steel splash panel. It is located below the white plastic valve(s) that holds the product tube(s). It is held in place by 4 screws.
- 2. When this panel is removed you will notice the circuit board that has electronic components on it. You will notice one (1) red light turned on indicating that there is power supplied to the board.
- 3. Locate the temperature adjustment potentiometer (TEMP ADJUST), which is on the bottom of the circuit board in the center. It is a blue plastic square with a white circular center with a slot.

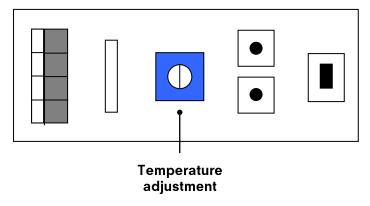

If the Dispenser is too Cold

- 1. Turn the white center slot left or counter clockwise to the 11 o'clock position.
- 2. Allow this adjustment to take effect for 3 hours. If the dispenser is still not warm enough, turn the temperature adjustment slot to 10 o'clock and repeat the wait time. You can further adjust the temperature to 9 o'clock and repeat the wait time.
- 3. If, after these adjustments are made, the dispenser is still too cold, please call the SureShot Solutions Technical Assistance Center.

If the Dispenser is too Warm

- 1. Turn the white center slot right or clockwise to the 1 o'clock position.
- 2. Allow this adjustment to take effect for 3 hours. If the dispenser is still not cold enough, turn the temperature adjustment slot to 2 o'clock and repeat the wait time. You can further adjust the temperature to 3 o'clock and repeat the wait time.
- 3. If, after these adjustments are made, the dispenser is still too warm, please call the SureShot Solutions Technical Assistance Center.

If you have any questions or concerns while performing this procedure, please contact the SureShot Solutions Technical Assistance Center by phone at 1-888-777-9990 or e-mail at service@sureshotsolutions.com. Find other helpful instruction sheets and videos on our website: www.sureshotsolutions.com.

D-19-052 Rev. D Page 1 of 1